




STORM

BESPOKE SECONDARY GLAZING

Horizontal sliding unit

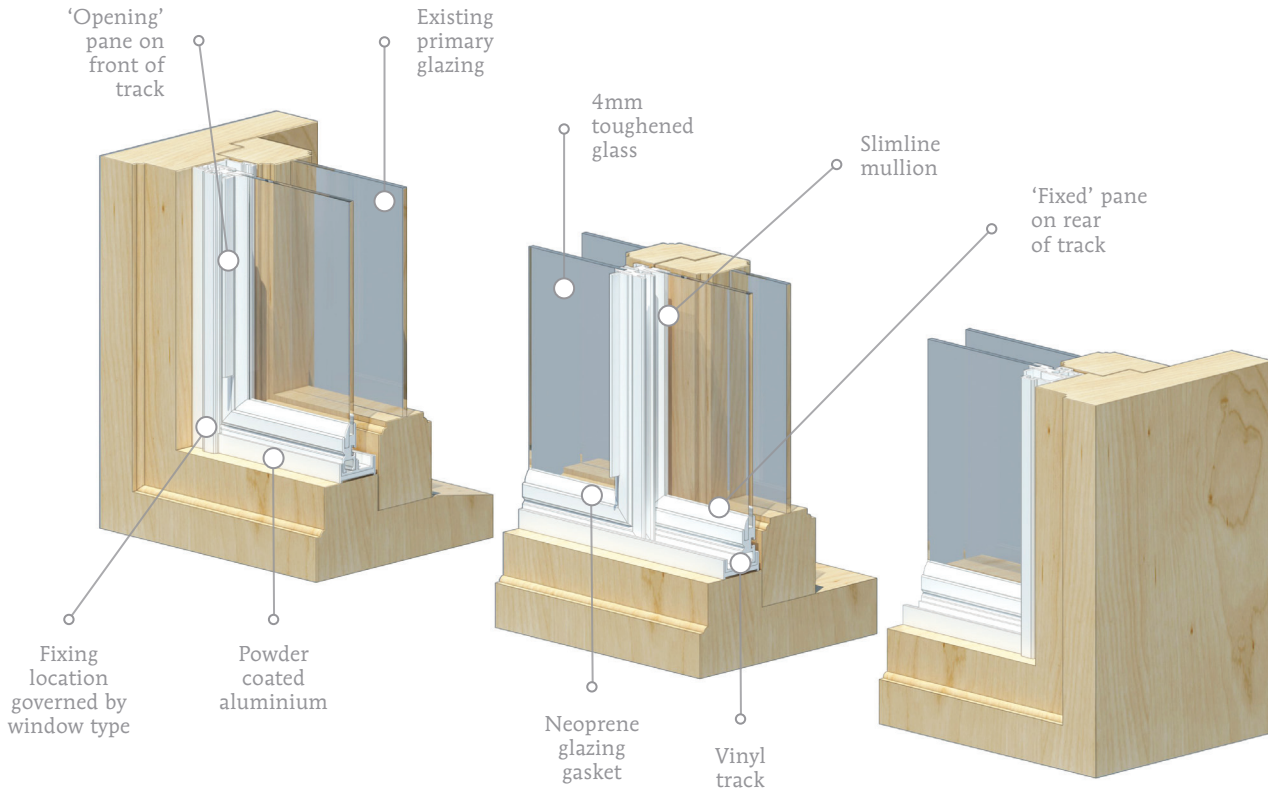

BENEFITS



Discreet



Sound reduction



Reduce heat loss



Ventilation



U-value

PRODUCT SPECIFICATION

- Toughened glass to BS EN 12150 as standard
- Aluminium - 6063T6 alloy to BS EN 755
- Neoprene gasket to BS738B

A more detailed cross section drawing can be downloaded from our website.



Heritage | Historic | Classic