










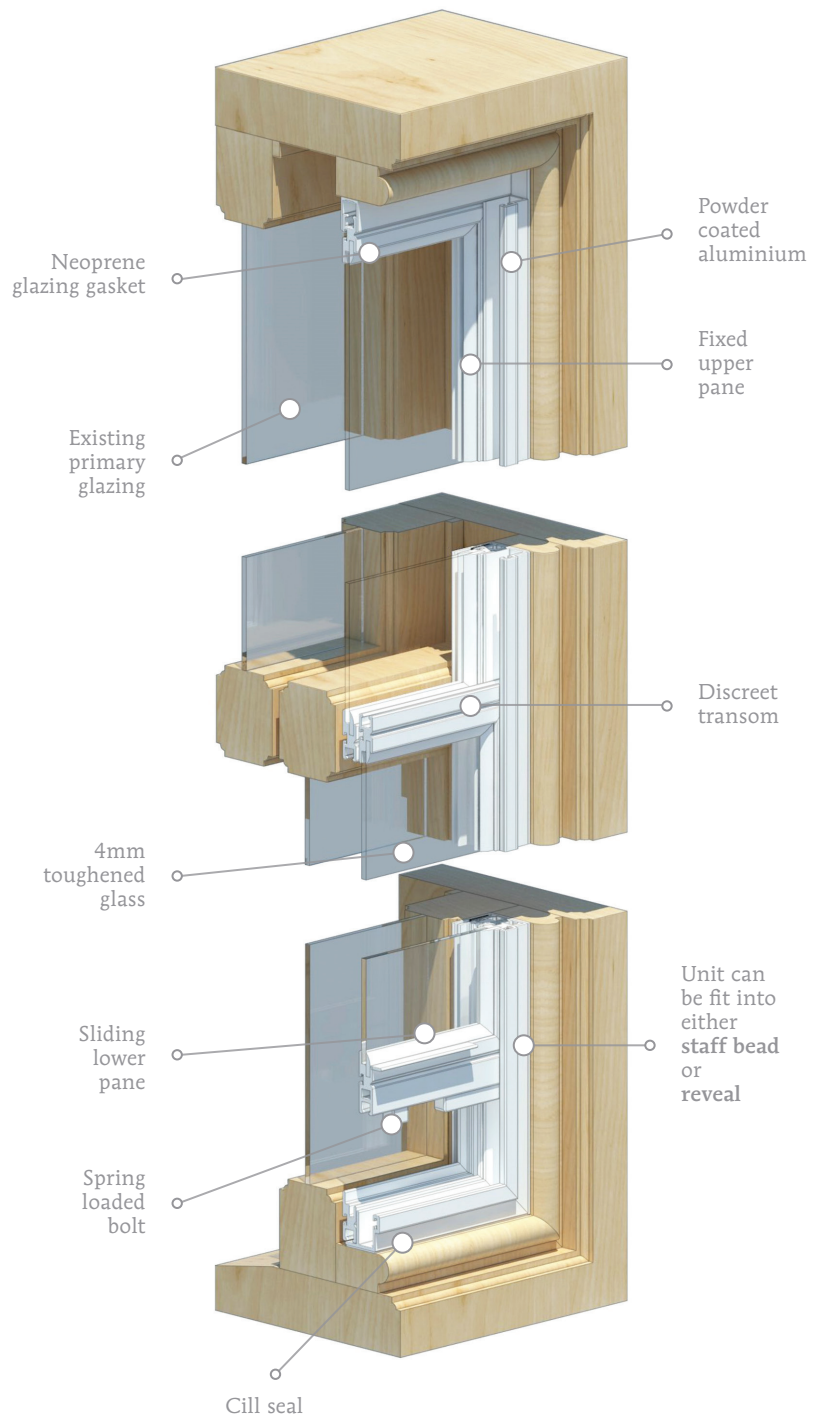
STORM

BESPOKE SECONDARY GLAZING

Lower vertical sliding sash unit

BENEFITS

-  Discreet
-  Sound reduction
-  Reduce heat loss
-  Ventilation
-  Magnetic system
-  U-value
-  Spring assisted opening



PRODUCT SPECIFICATION

- Toughened glass to BS EN 12150 as standard
- Aluminium - 6063T6 alloy to BS EN 755
- Neoprene gasket and cill seal to BS738b

A more detailed cross section drawing can be downloaded from our website.



Heritage | Historic | Classic